


QSC

application guide

Live Bands **AET** Application Engineering Team

Rev A May 2017

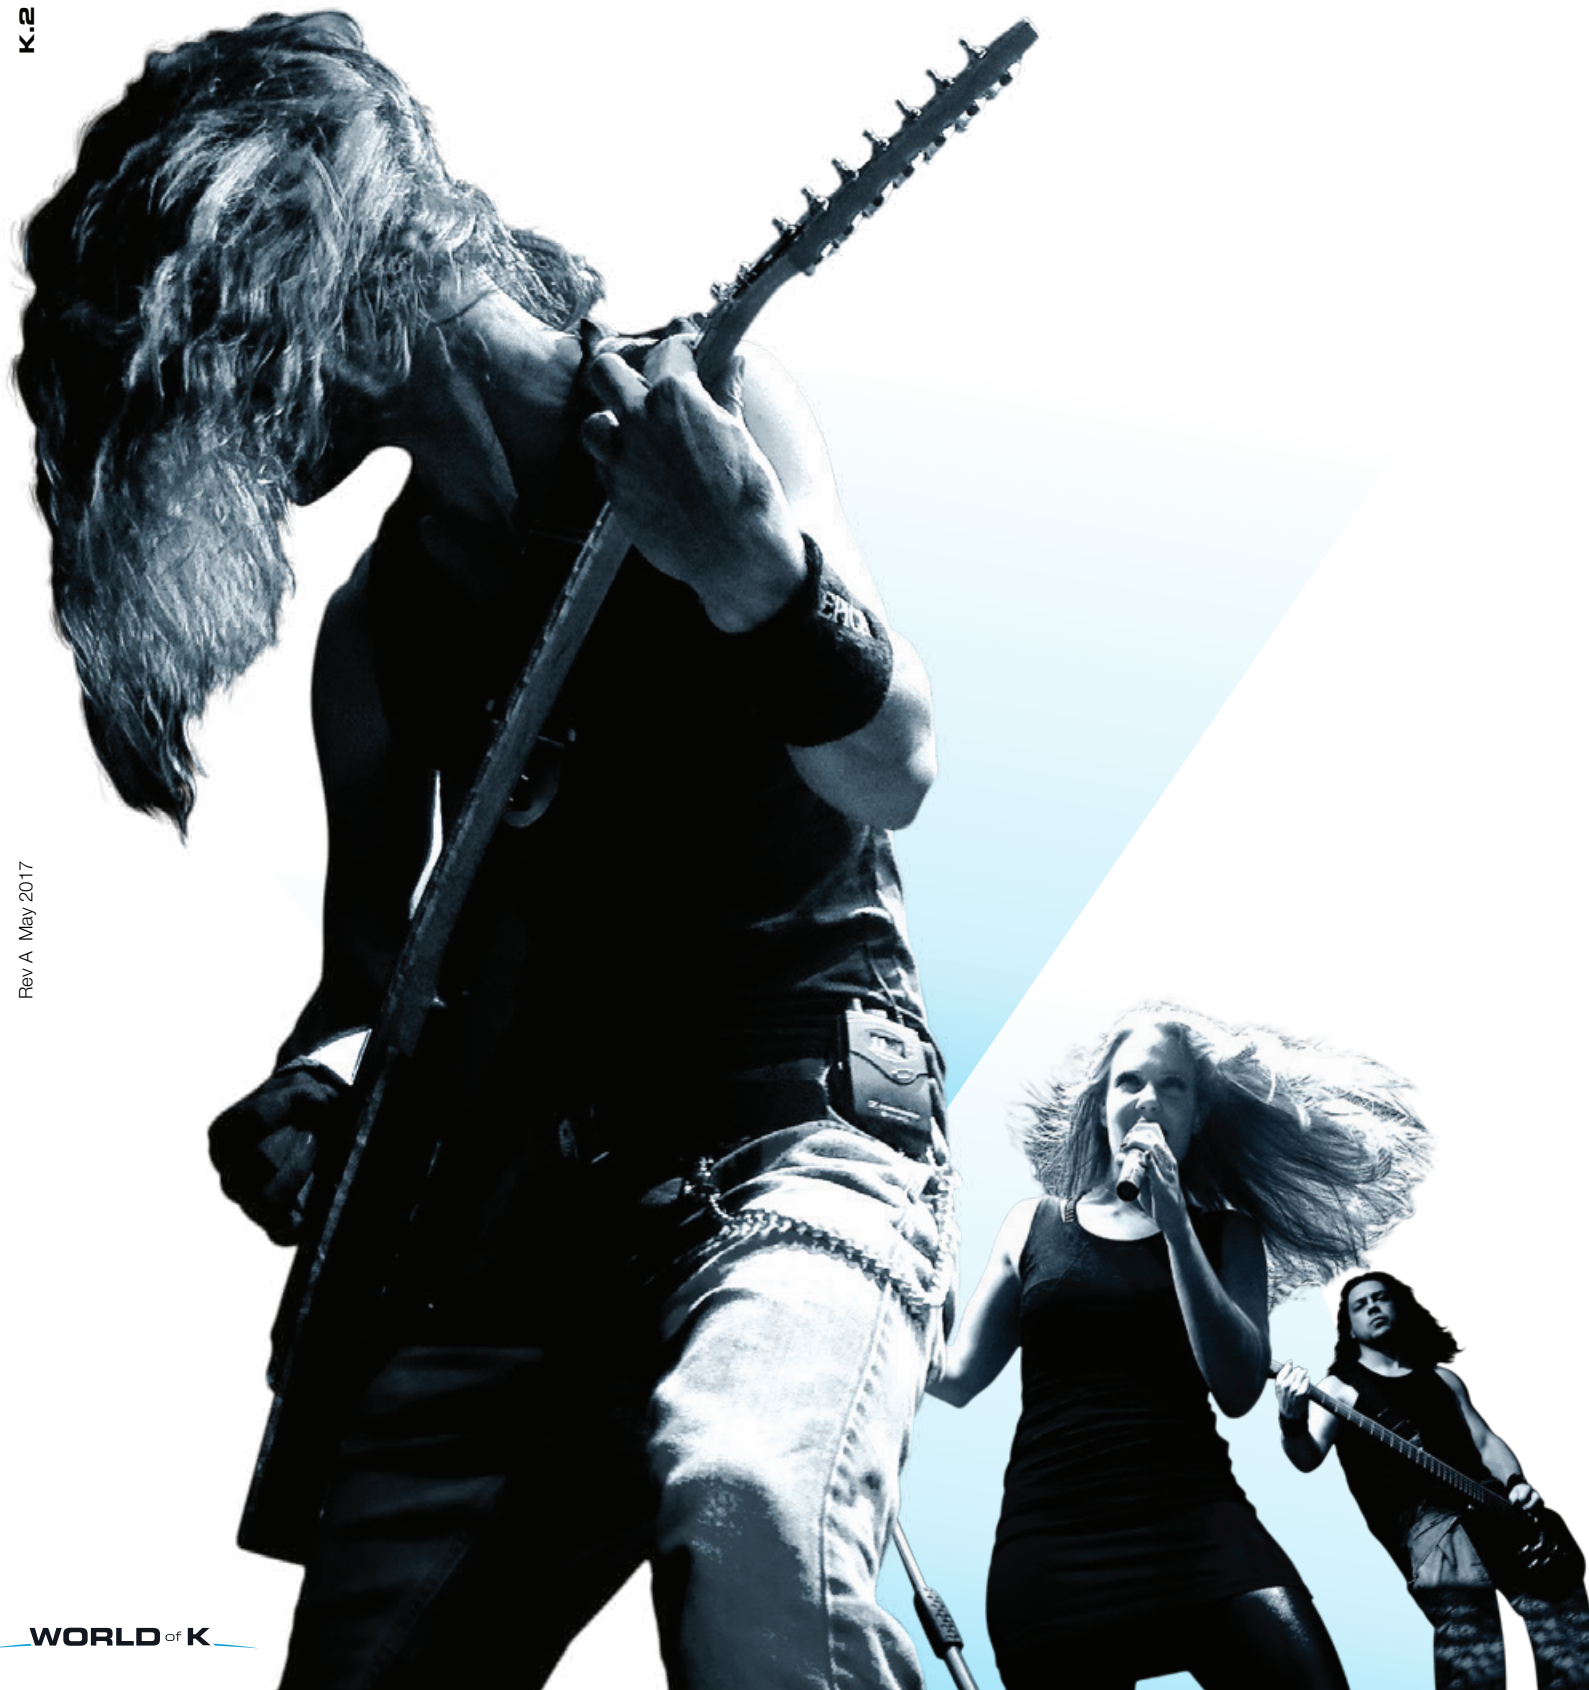

SINCE THEIR INTRODUCTION IN 2009, K FAMILY LOUDSPEAKERS HAVE BECOME THE GO-TO FAVORITE PRODUCT FOR PROFESSIONAL AUDIO USERS MORE THAN A MILLION TIMES OVER. CONTINUING THAT TRADITION, THE QSC K.2 SERIES IS QUITE SIMPLY THE “NEXT STANDARD” IN POWERED LOUDSPEAKERS.

THIS APPLICATION GUIDE IS DESIGNED TO OFFER YOU A FEW EXAMPLES OF HOW TO UTILIZE THE K.2 SERIES IN COMMON MUSICIAN AND BAND SITUATIONS. WHILE EACH INDIVIDUAL OR GROUP’S NEEDS MAY VARY, THIS GUIDE SHOULD SERVE AS A GOOD STARTING POINT ON HOW TO CONFIGURE AND DEPLOY THESE PRODUCTS IN YOUR APPLICATION. THERE ARE ALSO MANY OTHER ASSETS AVAILABLE TO YOU ONLINE AT [QSC.COM](https://www.qsc.com) INCLUDING VIDEOS, TECHNICAL DOCUMENTS AND MORE TO HELP YOU GET THE MOST FROM YOUR QSC PURCHASE. WE HOPE YOU TAKE ADVANTAGE OF EVERYTHING AVAILABLE AND WISH YOU A MOST SUCCESSFUL AND ENJOYABLE EXPERIENCE WITH YOUR K.2 SERIES.

ONE FINAL NOTE: DON’T FORGET TO REGISTER YOUR K.2 SERIES ONLINE AT [QSC.COM](https://www.qsc.com) TO RECEIVE OUR FREE GLOBAL 6-YEAR EXTENDED WARRANTY. WHILE YOU’LL PROBABLY NEVER USE IT, IT ADDS AN ADDITIONAL LEVEL OF CONFIDENCE THAT YOUR PURCHASE WILL DELIVER LASTING PERFORMANCE NIGHT AFTER NIGHT, YEAR AFTER YEAR.



WHAT'S NEW

Let's look at the inputs on the K.2 loudspeakers. They're still somewhat familiar to the K user, but updated a bit. As with the legacy K series, Input A again can be mic or line level, but Input B now can be either a line level input or a high-Z one suitable for musical instruments that have passive magnetic or piezo pickups. That's right—the K.2 Series loudspeakers can be used as guitar or bass combo amp, and they won't load down the instrument like a regular mic or line input would. Input C is a stereo-summed-to-mono channel with a 3.5 mm stereo jack, suitable for playback from portable digital audio devices such as phones, MP3 players, etc.

The three inputs each have their own gain knob and get mixed down to provide signal for the digital signal processing (DSP) and class D amplification stages. A line-level summed output provides a means to send the mixed signal on to other loudspeakers or other devices.

The biggest advance is in the DSP capabilities of the K.2 loudspeakers. In addition to voicing and protection duties, the K.2 Series DSP offers an array of user-configurable parameters that include EQ, delay, and presets. Yes, presets.

[K.2 loudspeakers have 11 factory presets so you can quickly dial in a collection of settings tailored to a certain application.](#)

DEFAULT	The standard voicing of the K.2 speaker
* LIVE	A voicing for live music reinforcement that lowers and balances frequencies that can be prone to feedback in a live mix.
* LIVE BRIGHT	A voicing for live music reinforcement that offers slightly more high end than the “Live” voicing.
DANCE	A voicing that focuses on high-end clarity and low end extension, primarily for Dance/Pop/Hip Hop/etc music.
* STAGE MONITOR 1	A voicing for using a stage monitor with a microphone that lowers and balances frequencies that can be prone to feedback in a monitor mix.
* STAGE MONITOR 2	A voicing for using a stage monitor without a microphone (such as a drum or keyboard monitor) that offers more low frequency extension than Stage Monitor 1.
ACOUSTIC GUITAR/VOX	A voicing for a vocal mic plugged into input A, and an acoustic guitar plugged into channel B that lowers and balances frequencies prone to feedback between those two input sources.
* BASS AMP	A voicing optimized to provide performance similar to that of a combo bass amplifier.
HAND MIC	A voicing that lowers and balances frequencies that can be prone to feedback with common handheld dynamic microphones when used without a mixer.
HEAD MIC	A voicing that lowers and balances frequencies that can be prone to feedback with common headset microphones when used without a mixer.
STUDIO MON	A voicing that provides a more balanced overall speaker response with deeper extension to be used as a nearfield or studio monitor for mixing.

* PRESETS FEATURED IN THIS APP GUIDE

The K.2 Series loudspeakers also offer four bands of user-adjustable EQ:

HIGH	0 to -6 dB	1–10 kHz	Shelving
EQ1	0 to -6 dB	50 Hz–20 kHz	Q 0.4-4
EQ2	0 to -6 dB	200 Hz–20 kHz	Q 0.4-4
LOW	0 to -6 dB	100-500 Hz	Shelving

Up to 100 ms of delay.

80, 100, or 125 Hz high-pass filtering for use with a subwoofer.

The diagram illustrates the control interface of the K.2 Series loudspeaker. It features a central digital display showing menu options and a physical control panel below it. Callouts provide detailed information about the settings available on the display and the physical controls.

Input A select: MIC or LINE

Input B select: HI-Z or LINE

Factory Preset select: DEFAULT, LIVE, LIVE BRIGHT, DANCE, STAGE MONITOR 1, STAGE MONITOR 2, AC GUIT/VOX, BASS AMP, HAND MIC, HEAD MIC, STUDIO MON

Sub menu select: NO SUB, 80 HZ, 100 HZ, 125 HZ

Delay select: 0 ms to 100 ms
in 0.5 ms increments from 0 to 10;
in 1 ms increments from 10 to 100

High	0 to -6 dB	1–10 kHz	Shelving
EQ1	0 to -6 dB	50 Hz–20 kHz	Q 0.4–4
EQ2	0 to -6 dB	200 Hz–20 kHz	Q 0.4–4
Low	0 to -6 dB	100–500 Hz	Shelving


Settings select: SAVE SCENES, RECALL SCENES, LED, CONTRAST, FACTORY RESET

EQ select: IN or OUT

The physical control panel includes three gain knobs (A, B, C) with 0dB, -10dB, and STEREO settings, input selector buttons (MIC/LINE, HI-Z/LINE), a limiter and power button, and a power on/off switch. It also features three input jacks (A, B, C) and a mix out jack (POST GAIN).

SMALL ACOUSTIC BAND

A four-piece folk/acoustic band utilizes all K8.2 loudspeakers for their PA mains and monitors. Elbow room is at a premium on the shallow stages they often play on, so the bass player goes direct into the digital mixer. The front wedge is set to the Stage Monitor 1 preset to reduce the likelihood of feedback. The bassist and conga player don't have vocal mics and therefore their wedge uses the Stage Monitor 2 preset.

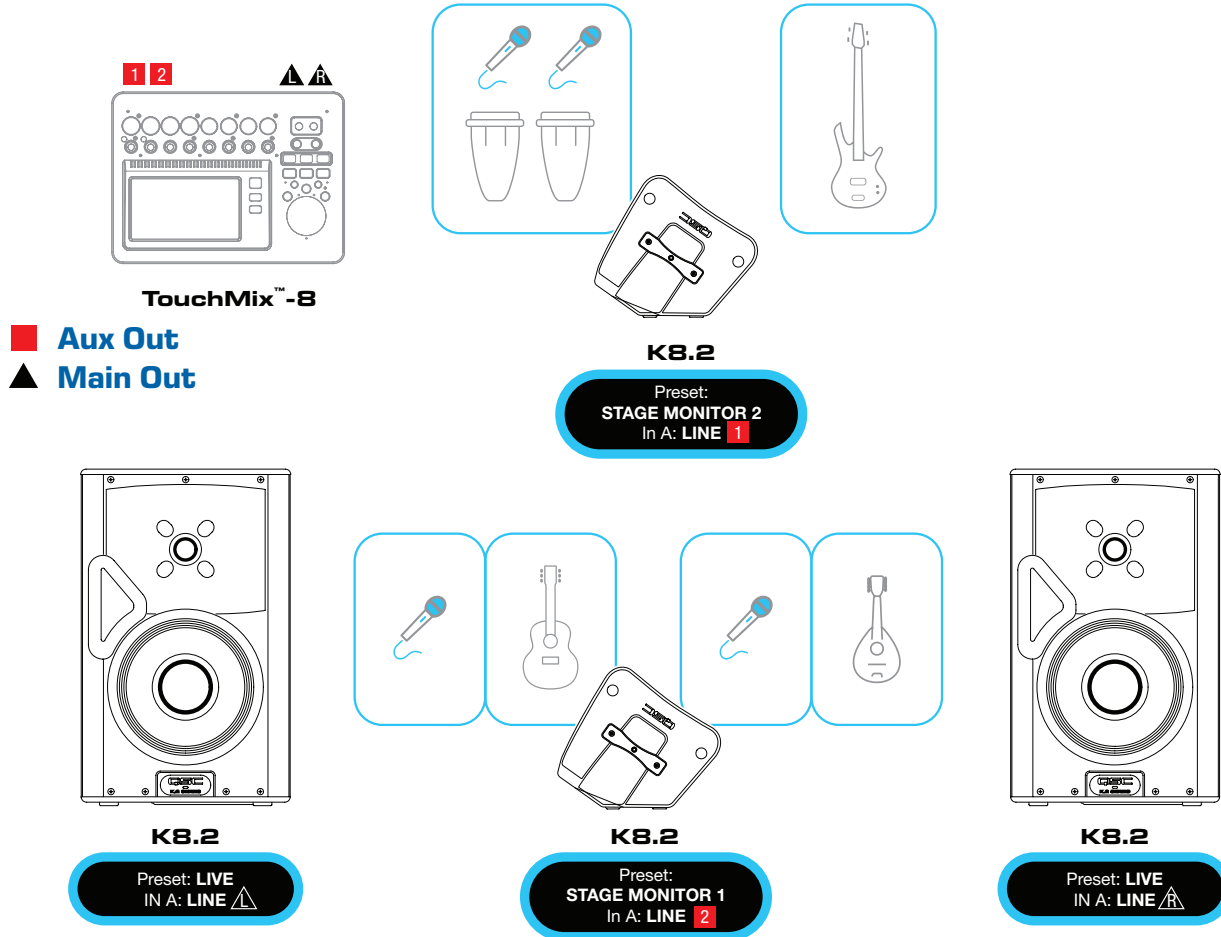

TECH REQUIREMENTS:

Two vocals—one male, one female

Two acoustic guitars (direct in), electric bass (direct line out from bass amp), high and low congas (both miked)

Mains:

Two K8.2 loudspeakers [preset Live; no sub]


Monitors:

Vox duo + acoustic guitars: K8.2 [preset Stage Monitor 1]

Bass + congas: K8.2 [preset Stage Monitor 2]

ROCK QUARTET

Guitar, bass, drums, and keys are a popular band format. The lead guitarist also handles most of the lead vocals, with the bassist and keyboardist helping on background and occasional lead. They rely on two K10.2 tops and a KS212C Cardioid Sub for the mains. The guitarist and keyboardist are both vocalists as well and use K8.2 wedge monitors set to the Stage Monitor 1 preset. The drummer uses a K10.2 as a wedge monitor with the Stage Monitor 2 preset, and on the backline the bassist uses a K10.2 as a stage amp.

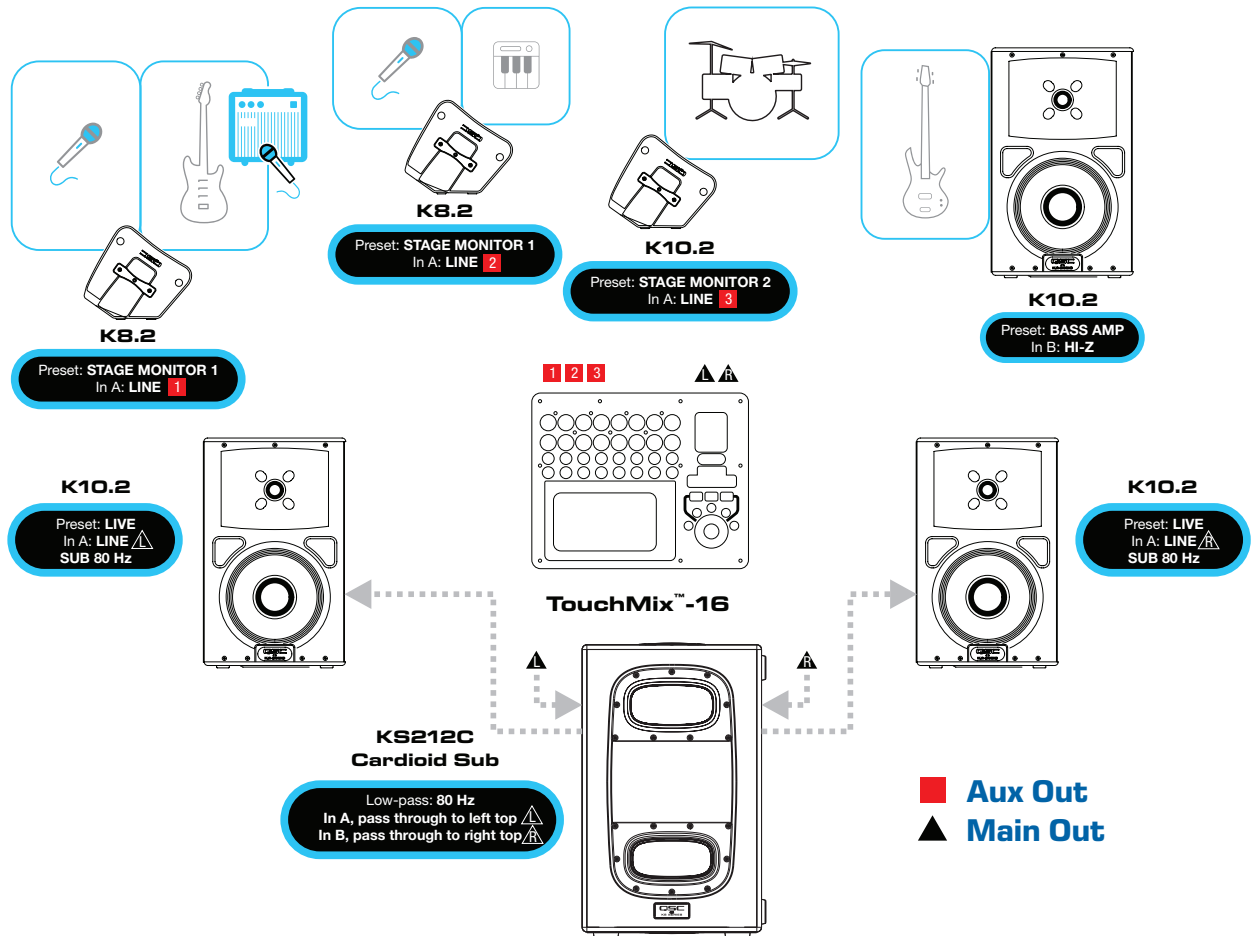

TECH REQUIREMENTS:

Lead guitarist/vocalist
 Lead guitarist's amp is miked
 Bassist/background vocalist
 Electronic keyboardist (direct in) /background vocalist
 Full drum kit, fully miked.

Mains:

Two K10.2 loudspeakers [preset Live; sub 80 Hz]
 KS212C Cardioid Sub [low-pass 80 Hz]

Monitors:


Guitarist/Lead vocalist: K8.2 [preset Stage Monitor 1]
 Drums: K10.2 [preset Stage Monitor 2]
 Keyboards/BG vocals: K8.2 [preset Stage Monitor 1]

Backline:

Bass: K10.2 [preset Bass Amp]; Mix Out to mixer, for mains and monitors

LARGE BAND

This band comprises a lead vocalist accompanied by guitar, bass, keyboards, drums, and a four-piece horn section. For mains they use two K12.2 tops fed from the mixer's left and right main outputs plus two KW181 subwoofers fed from a mixer aux output; to give the horns more punch the mains are set to the Live Bright preset. The lead vocalist and guitarist use in-ear monitors but the rest of the band use K8.2 loudspeakers as wedges; the keyboardist's, bassist's, and drummer's monitors use the Stage Monitor 2 preset, while the horn section use Stage Monitor 1 to reduce the risk of feedback.

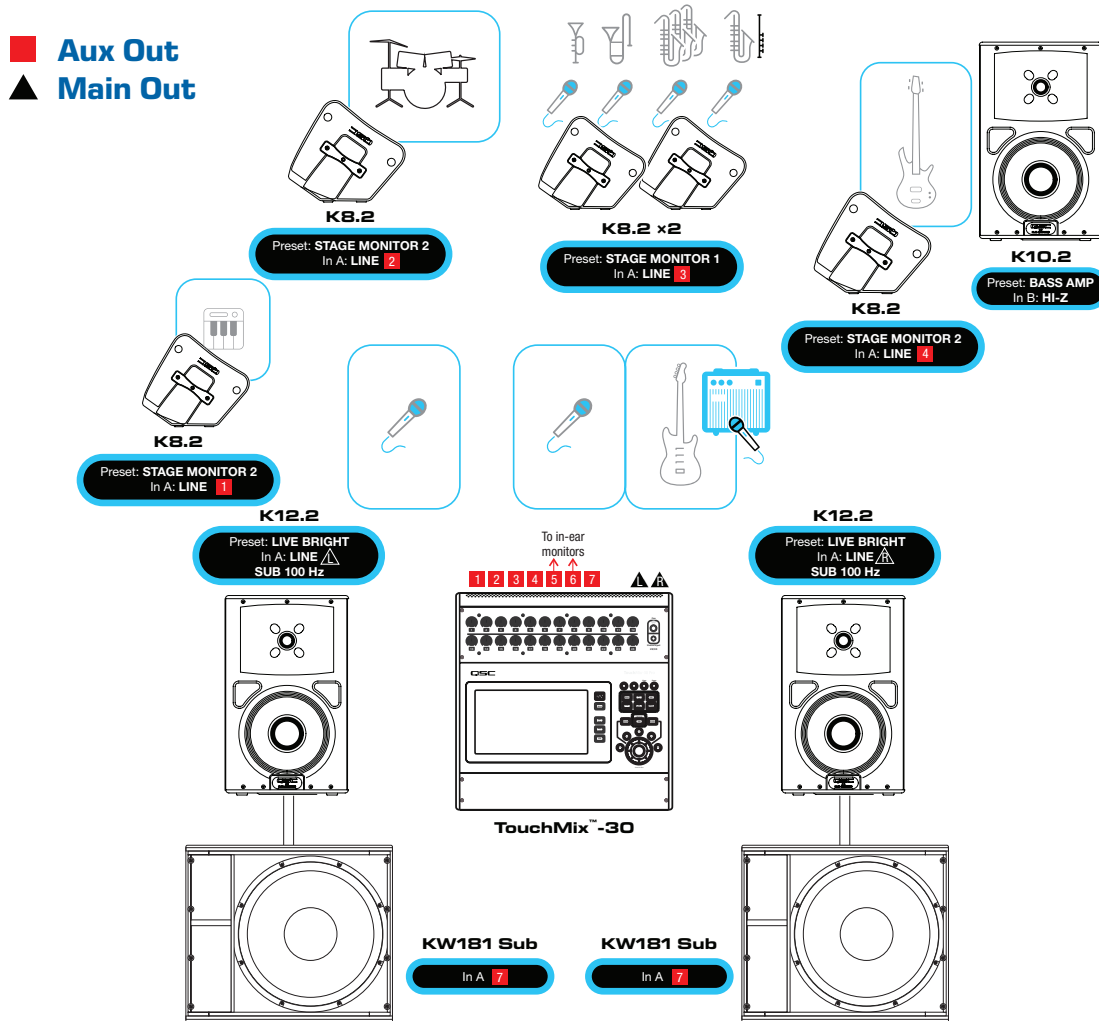

TECH REQUIREMENTS:

Lead vocal plus lead guitarist/vocalist, both on in-ears

Lead guitarist's amp is miked

Electronic keyboards, direct in

Full drum kit, fully miked.

Trumpet

Trombone

Saxes and flute

Saxes

Mains:

Two K12.2 loudspeakers [preset Live Bright; sub 100 Hz]

Two KW181 subwoofers [built-in low-pass at 100 Hz]

Monitors:

Drums: K8.2 [preset Stage Monitor 2]

Keyboards: K8.2 [preset Stage Monitor 2]

Trumpet + Trombone: K8.2 [preset Stage Monitor 1]

Reeds 1 + Reeds 2: K8.2 [preset Stage Monitor 1]

Bass: K8.2 [preset Stage Monitor 2]

Backline:

Bass: K10.2 [preset Bass Amp]; Mix Out to mixer, for mains and monitors



WORLD of K qsc.com

©2017 QSC, LLC. All rights reserved. QSC and the QSC logo are registered trademarks of QSC, LLC in the U.S. Patent and Trademark Office and other countries. World of K is a trademark of QSC, LLC.

6 YEAR WARRANTY | with Product Registration