



**Attero Tech by QSC**  
**Axon A4Mio | Axon A8Mio**

AES67 Network Audio I/O Endpoints

**Features**

- A8Mio: 8x8 mic/line analog I/O
- A4Mio: 4x4 mic/line analog I/O
- Software-controlled preamps
- PoE powered
- AES67 network daisy chain support
- Q-SYS plugin support
- 1/3 RU (A4Mio) and 1/2 RU (A8Mio) with table and rack mounting accessories




**Applications: Boardrooms • House of Worship • Fitness • Huddle Spaces • Higher Education • Courtrooms**

The Axon A8Mio and A4Mio are high-performance, AES67 network audio I/O endpoints for installed AV systems, including the Q-SYS Ecosystem. These fixed-channel endpoints offer a cost-effective I/O solution to integrate analog audio channels into a wide range of network audio applications while maintaining small form factors.

**Simple Q-SYS Ecosystem Integration:** A Q-SYS Designer control plugin helps expedite the installation process, allowing integrators to drag-and-drop Axon audio endpoints into a Q-SYS design without the need for any complicated control programming. The plugin enables full preamp control on Q-SYS control devices.


**Application Example**

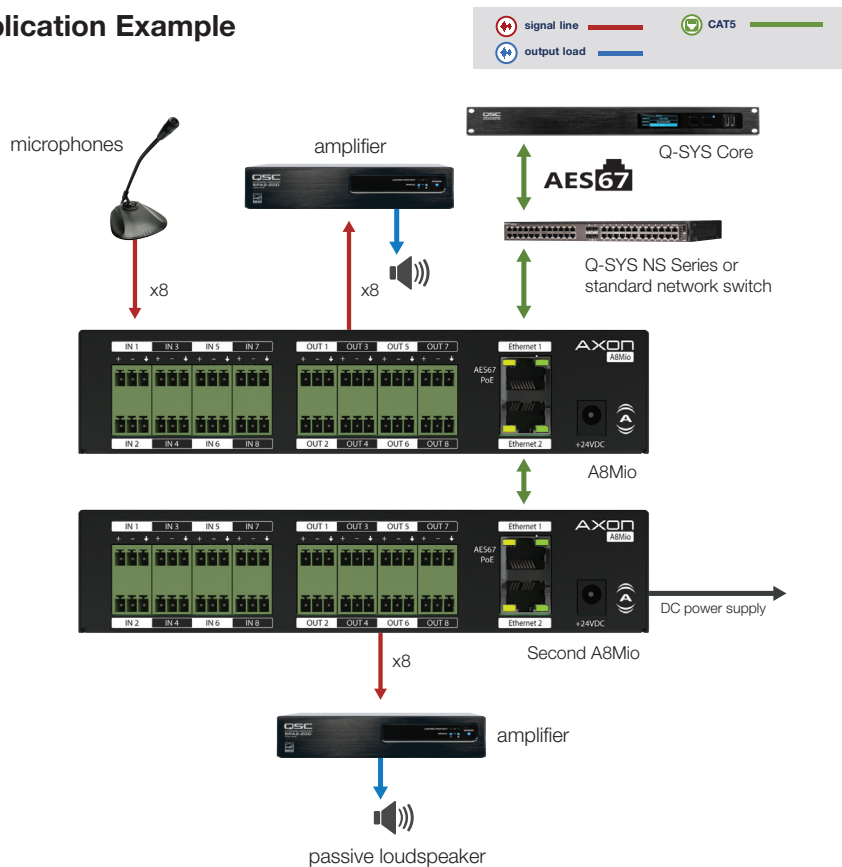

# Axon A4Mio | A8Mio Details

## A4Mio Specifications

Audio Inputs (Mic/Line)		Network	
Connector type	3.81 mm Euro, 3 position (16-28 AWG)	Physical layer	Ethernet
Gain	-8 dB to +34 dB gain, 1 dB increments	Connector (s)	Dual RJ-45
Input impedance	>2 K $\Omega$ at any gain	Cable quality	CAT-5e or better, UTP
Maximum input level	-8 dB gain, max input = +16.5 dBu (+24 dBu w/pad)	Transmission speed	1 Gbps
Phantom power	+48 V, software selectable per channel	Power	
THD+N	<0.05% @ 1 kHz, -3 dBFS input. 20-20 kHz	PoE power	802.3.af/at Class 0
Frequency response	20-20 kHz, +/- 1 dB (Line), 50-20 kHz +/- 1 dB (Mic)	Power consumption	<7 W (with phantom power enabled and powered by 24 V DC) <8 W (on PoE)
EIN	-125 dBu	Power options	PoE, +24 V DC (PoE and external DC can be used for redundancy)
Audio Line Outputs		General	
Connector type	3.81 mm Euro, 3 position (16-28 AWG)	Dimensions (HWD)	1.6 x 5.4 x 7.9 in (40.6 x 137.2 x 200.7 mm)
Maximum output levels	+24 dBu	Weight	1.8 lb (0.83 kg)
THD+N	20 Hz-20 kHz, +/- 1 dB	Mounting options	Rack-mountable, 1 RU 1/3-rack width Surface-mountable *All mounting hardware offered as accessories
Frequency response	20-20 kHz, +/- 1 dB (Line), 50-20 kHz +/- 1 dB (Mic)	Regulatory compliance	FCC Part 15, Subpart B, Class A EMC CE (EN55032 EMC / EN55035 ESD) WEEE RoHS REACH
Dynamic range	100 dB	Environmental	
		Operating temperature	0 to 40° C

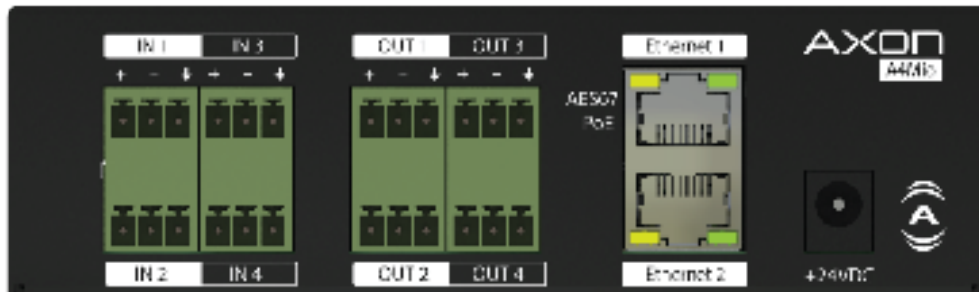

1675 MacArthur Boulevard • Costa Mesa, CA 92626 • Ph: 800/854-4079 or 714/957-7100 • Fax: 714/754-6174

© 2020 QSC, LLC all rights reserved. QSC and the QSC logo are registered trademarks of QSC, LLC in the U.S. Patent and Trademark office and other countries. All other trademarks are the property of their respective owners. Patents may apply or be pending.

Axon A4Mio | A8Mio Spec Sheet 1/13/2020



# Axon A4Mio | A8Mio Details

## A8Mio Specifications

Audio Inputs (Mic/Line)		Network	
Connector type	3.81 mm Euro-block, 3 position (16-28 AWG)	Physical layer	Ethernet
Gain	-8 dB to +34 dB gain, 1 dB increments	Connector (s)	Dual RJ-45
Input impedance	>2 K $\Omega$ at any gain	Cable quality	CAT-5e or better, UTP
Maximum input level	-8 dB Gain, max input = +16.5 dBu (+24 dBu w/pad)	Transmission speed	1 Gbps
Phantom power	+48 V, software selectable per channel	Power	
THD+N	<0.05% @ 1 kHz, -3 dBFS input. 20-20 kHz	PoE power	802.3.af/at Class 0
Frequency response	20-20 kHz, +/- 1 dB (Line), 50-20 kHz +/- 1 dB (Mic)	Power consumption	<10 W (with phantom power enabled and powered by 24 V DC) <12 W (on PoE)
EIN	-125 dBu	Power options	PoE, +24 V DC (PoE and external DC can be used for redundancy)
Audio Line Outputs		General	
Connector type	3.81 mm Euro-block, 3 position (16-28 AWG)	Dimensions (HWD)	1.6 x 7.4 x 8 in (40.6 x 188 x 203 mm)
Maximum output levels	+24 dBu (-15.5 dBu w/pad)	Weight	2.1 lbs (0.95 kg)
THD+N	<0.05% @ 1 kHz, -3 dBFS output. 20-20 kHz	Mounting options	Rack-mountable, 1 RU 1/3-rack width Surface-mountable *All mounting hardware offered as accessories
Frequency response	20-20 kHz, +/- 1 dB (Line), 50-20 kHz +/- 1 dB (Mic)	Regulatory compliance	FCC Part 15, Subpart B, Class A EMC CE (EN55032 EMC / EN55035 ESD) WEEE RoHS REACH
Dynamic range	100 dB	Environmental	
		Operating temperature	0 to 40° C

